



# SA115B-XXV

[www.sac-ontop.com.tw](http://www.sac-ontop.com.tw)

## 15W Switching Adapter

### Input

Rated Voltage	100 - 240 VAC
Max. Voltage	90 - 264 VAC
Line Frequency	47 - 63 Hz
Current	400mA at 100-240VAC
Configuration	IEC-320, C14, 3PIN

### Output

Model Name	Voltage	Current	Watt	Efficiency
SA115B-03V	3V	3.0A	9W	65%
SA115B-05V	5V	3.0A	15W	70%
SA115B-09V	9V	1.7A	15.3W	75%
SA115B-12V	12V	1.3A	15.6W	75%
SA115B-15V	15V	1.0A	15W	75%
SA115B-24V	24V	0.65A	15.6W	75%
Line Regulation	Less than $\pm 2\%$			
Load Regulation	Less than $\pm 5\%$			
Protections	OCP, OVP & Short circuit			
Ripple & Noise	$\leq 150\text{mVp-p}$			

### Environment

Operating Temp.	0°C - 40°C
Storage Temp.	-20°C - 80°C
Operating Humidity	20% - 80% (Non-condensing)
RoHS & WEEE	Standard

### Reliability

MTBF	50,000 hrs (by MIL-217 Standard)
Safety	ITE: UL, cUL, TUV/GS, CE, CB, PSE

### Others

Package	80 pcs/box
Min. Order	1K pcs/lot
Warranty	1 year


### Electrical

Topology	Switching Mode
Hi-Pot	1800 Vac/1sec @ 5mA (primary - secondary)
Leakage Current	$\leq 3.5\text{mA}$ , at 264VAC/50Hz
Hold Up Time	$\geq 6\text{mSec}$
Standby Power Consumption	$\leq 0.3\text{ Watt}$ (As per EPS Guideline)
EMI	Complies with EMI directives
Energy Star Requirement	EPS 2.0 (Efficiency Level V)
ErP Requirement	Efficiency Level: Stage 2
MEPS Requirement	Efficiency Level: V

(3V, 5V, 9V, & 24V only comply with with CEC IV, ErP Stage 1, MEPS IV)

### Mechanical

Case Size	78L x 50W x 30H mm
Case Material	Black, 94V-1 or equivalent
Weight	150g $\pm 10\text{ g}$
DC Cord	4.92ft

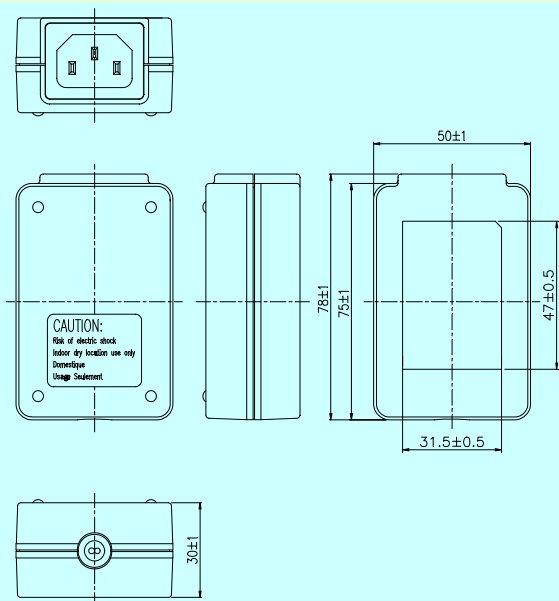

For reference only. For details please contact your local sales representative