

LTE05UW-Sx-BV

Switching AC/DC USB Version

Main Features:

- Meet efficiency DoE VI & ErP CoC V5. Tier II
- Output Power up to 5W
- EU Wall-Mount USB power supply



Technical Specification:

Input and Output Specification:

| | S1(USB) |
|------------------------|-----------------------------------|
| Input Voltage | 90-264 Vac |
| Frequency | 50 / 60Hz |
| Input Current | @115Vac 0.4Arms; @230Vac 0.25Arms |
| Inrush Current | No components damaged |
| Output Voltage | 5V |
| Min Load | 0A |
| Max Load | 1 A |
| Output Power | 5W |
| Line Regulation | ±1.0% |
| Load Regulation | ± 5% |
| Ripple & Noise (mVp-p) | 250 |
| Efficiency@115V/@230V | >68%; >68% |

Note: 1.Load regulation is tested at 10% to 100% of rated load.

Note: 2.Peak-to-peak for 5W(convection rating)@115Vac MIN.; Measurements with a 20MHz bandwidth and terminated with a 10uF electrolytic Cap.in parallel with a 0.1uf ceramic Cap.

Environment Specification:

Operating Temperature:0-40°C

Storage Temperature:-40 to 85 °C

Storage Humidity:5% to 95% RH

Safety and EMC Approval:

ITE: CE. CB

Mechanical Specification:

Dimensions:

EU PLUG: 47.9*27.8*44.7(mm)


Protection Specification:

Over Voltage Protection : Auto-Recovery

Over Load protection : Hiccup/Auto-Recovery

Short Circuit Protection:Hiccup/Auto-Recovery

Mechanical Drawing:

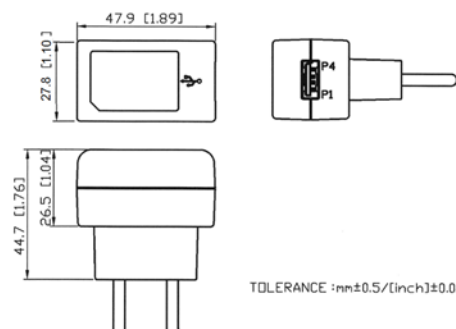

TOLERANCE :mm±0.5 [inch]±0.02



ONTOP ELECTRONIC CO.,LTD TEL:886-2-28382606, FAX:886-2-28382604

e-Mail: sales@sac-ontop.com.tw

Add: 2f-2 No.161 sec. 6, Zhong Shang North Rd. Taipei, Taiwan

www.sac-ontop.com.tw