


LTE-BC1000 BATTERY CHARGER

Features

- Microprocessor control with 2/3/8 stage automatic charging.
- 2/3/8 stage charging selectable on output panel.
- Automatic charging prevents the battery from overcharging.
- Suitable for Lead-acid batteries.
- LED indicator for charging status.
- Efficiency >85%

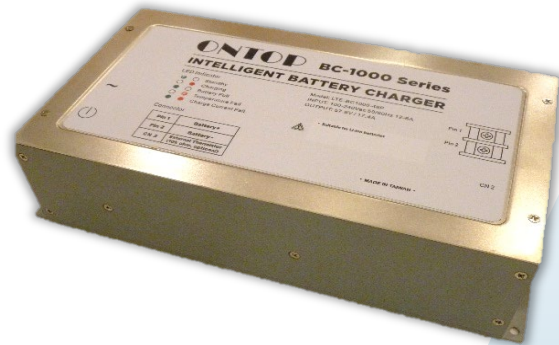

SPECIFICATION

Model No.	Charge Voltage	Charge Current	Battery Type	Output Power Max.
LTE-BC1000-48P	+57.6V	17.4A	48V Lead Acid	1000W
LTE-BC1000-24P	+28.8V	27.8A	24V Lead Acid	800W

- Universal Input 90-264VAC 50/60Hz
- Operating Temperature from -20°C~50°C
- Built-in active PFC function, PF>0.95
- Built-in remote ON/OFF control
- Class I power (with earth pin)
- Dimensions (L x W x H): length 341mm, width 140mm, height 67.3mm

Protection

- Over Voltage Protection
- Reverse Polarity Protection
- Short Circuit Protection
- Overheat protection
- Non-battery link protection

